


Description:

RX-15T LED tube lighting, A unique 360-degree rotation of tube clamp seat are free to adjust the direction of LED tube lights, Very suitable for families, shopping malls, stores and other Showcase decorative lighting, its use depends on your creativity.

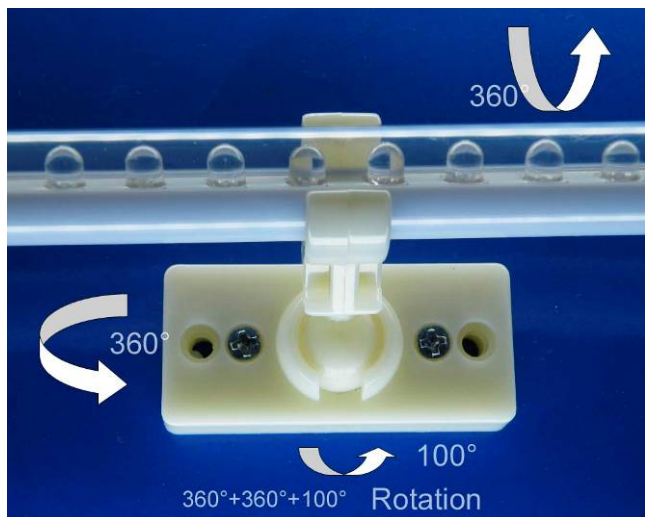


Advantages:


1. High-quality high-brightness LED
2. Chromium plating, PC tube, Beautiful beautiful
3. Waterproof design, waterproof grade IP67
4. 5.5x2.1mm DC plug wire, easy to install
5. B type is set to head and tail of male and female DC cable can be extended docking LED Lamp

Scope of application:

Home decorative lighting, fish tank aquarium lighting, cabinets, showcase, Showcase lighting decoration.
Home wash wall lamp, plant growth lights (red and blue color tube).



TYPE A: Plug connections with male at one ends



TYPE B: Plug connections with male and female at oposite ends



TYPE A: Input wire at one ends



TYPE B: Connections - wire at both ends

Mechanical Specifications:

LED lamp length :15cm, 30cm, 52cm
Diameter: Ø15mm
Operating Temperature: -20°C~50°C
IP Grade: IP67


Electronical Specifications:

Input: DC12V
Power: max 0.08W / LED
Center positive for stock, 5.5x2.1mm DC jack and plug
Or + Red wire , - Black wire

Note: Power quality may seriously affect the product life, Please use high-quality switching power supply, or directly using my company-related products.

Model Number	LED spacing	Tube Diameter	LED Type	Viewing Angle	Input Voltage	Max. Power	Continuous Connection
RX-15TH20-5R	20mm	15mm	5mm round	20°	12V	0.08W/LED	10M
RX-15TH20-5H	20mm		5mm straw hat	120°			10M
RX-15TH10-5R	10mm		5mm round	20°			5M
RX-15TH10-5H	10mm		5mm straw hat	120°			5M
RX-15T10-SFL	10mm		SFL/Piranha	80°			5M
RX-15T16-5050	16mm		TOP SMD5050	120°		0.24W/LED	3M

Dimension

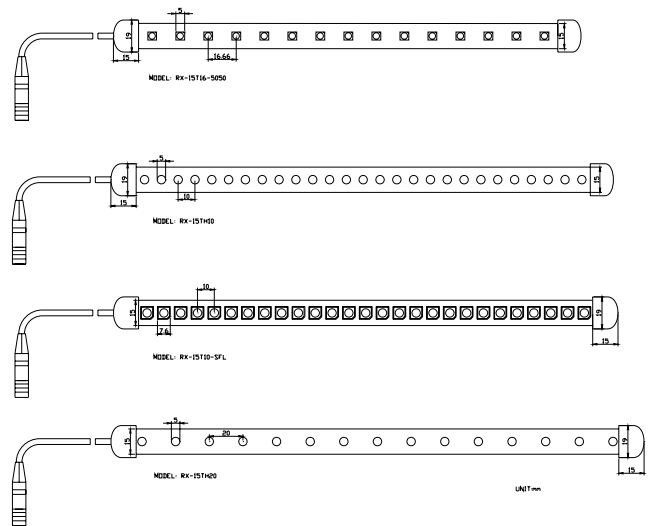

Available colors:

RX-15Txx-5R, RX-15Txx-5H, RX-15THxx-5R, RX-15THxx-5H Red, yellow, blue, green, purple, pink, white and warm white


Note: According to product data sheet, Where xx can be Related alphanumeric character or blank



RX-15T16-5050, Blue, white, warm white and RGB (RX-15T16-5050)



Wiring diagram



There is LED power supply and LED dimmer connection

