
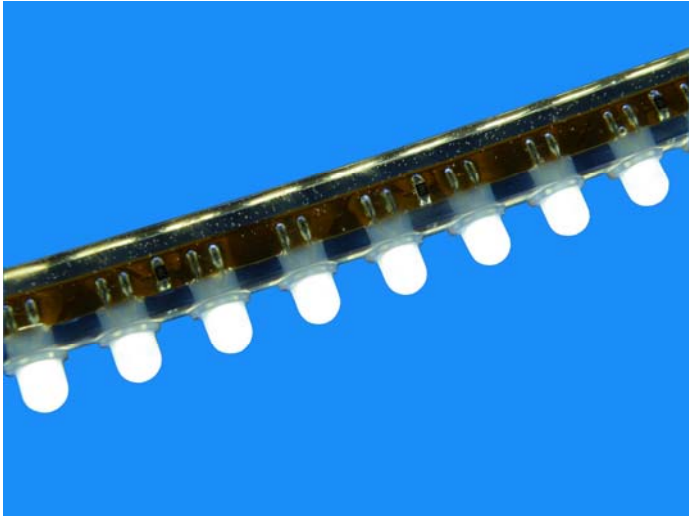


Description: RX-LED5MM30 flexible LED strip light, The use of high-quality 5R White diffused Round LED, Transparent PVC packages, flexible epoxy potting. can be applied to any accessible surface.

<p>Features:</p> <ol style="list-style-type: none"> 1.High quality white diffused LED 2.Energy saving 3.Can be cut each 3LEDs 4.Waterproof: IP67 5.Not break up, No RF interference 6.Long lifespan: ≥20000hrs. <p>Applications:</p> <ol style="list-style-type: none"> 1. Home decorations 2. Car motorcycle bicycle decorations Lighting 3. Advertising signboard Contour sign 4. Party and event centerpiece. 5. Emergency exit , Stairway,Archway 6. Do it yourself. 	
<p>Electronical Specifications:</p> <p>Input Voltage:12VDC Max Power: 2.5W/30CM Single LED viewing angle: 60° LED TYPE: 5R white diffused LED</p> <p>Main Material: Environmental protection PVC , FPC, LED, Polyurethane-modified epoxy resin</p>	<p>Mechanical Specifications:</p> <p>Dimensions (W x H): 8mm x 16mm Weight: 40g /30cm LEDs Space: 10mm Waterproof: IP67 Bending Diameter: at least 4 times the strip width Twisting Angle: 120 degrees per 30cm Stretching Force:2.5kg Operating Temperature: -10℃~50℃</p>
<p>※DC12V,the red or white side-line is the anode.</p>	

MODEL	Dimensions (W x H)mm	Colour	LED QTY	Luminous flux	IF20ma (mcd)/LED	INPUT (VDC)	MAX Power (W)	Maximum length of series
RX-LED5MM30-5R white diffused LED Basic length 30CM LED spacing10mm LED Viewing Angle 60°	8 x 16mm	625	30	18LM	400	12V	2.5W	5m
	8 x 16mm	525	30	115LM	2000		2.4W	
	8 x 16mm	460	30	25LM	400		2.4W	
	8 x 16mm	590	30	27LM	500		2.5W	
	8 x 16mm		30	5LM	300		2.4W	
	8 x 16mm	400	30	1.8LM	6		2.4W	
	8 x 16mm		30	105LM	2000		2.4W	
	8 x 16mm		30	96LM	1800		2.4W	

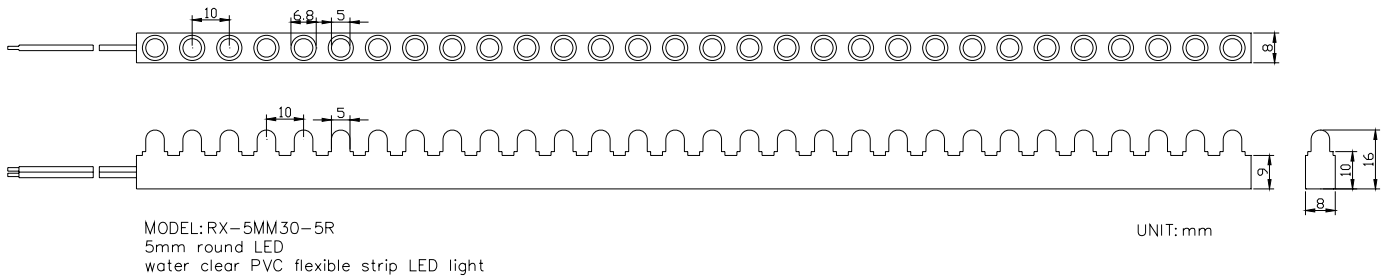

Dimensions in detail, please zoom



Input: DC12V
standard type P1J: $\text{Ø}2.1 * \text{Ø}5.5 * 10\text{mm}$ turning fork type, center positive for stock



Input : DC12V
Connect the red wire to the positive

